

MARTE A.O.




Tubo di colorazione blu, in compound speciale di PVC antiestrazione con spirale di rinforzo in PVC rigido antiurto. Resistentente ad abrasione e agenti atmosferici. Versione antistatica con cordicella di rame su richiesta.

- Aspirazione e mandata di olii minerali, carburanti grezzi (nafta, gasolio) e lubrificanti in genere.

Blue hose in special antimigration PVC compound reinforced with an anti-shock rigid PVC spiral. High mechanical properties, light, flexible, really good bending, resistant to abrasion and weather conditions. Antistatic version with copper wire on request.

- Suction and delivery of lubricants, crude oils (naphta and diesel oil).

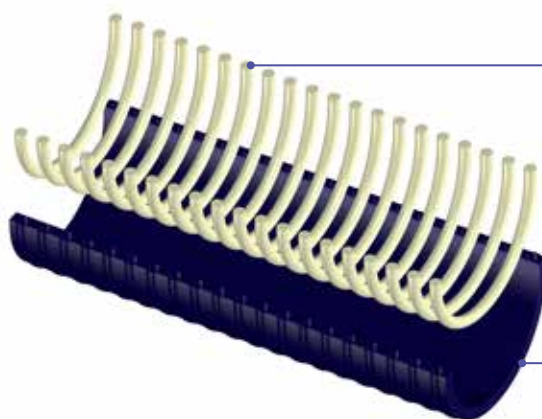

Spirale in PVC rigido antiurto
Anti-shock rigid PVC spiral

Tubo in PVC antiestrazione
Antimigration PVC compound

Scheda tecnica / Technical data

Codice	Ø Int.	Spess. Min.	Spess. Max.	Peso	P.E.	P.S.	Depr.	R. Curvatura	Lg. Rotolo	Vol.
Code	Ins. Ø	Min wall th.	Max. wall th.	Weight	WP	BP	Vac.	Bending	Coil lgth.	Vol.
	mm	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³
MT 01 019.0 000.0	19,1*	4,0	4,3	390	8	24	10	140	50	0,071
MT 01 020.0 000.0	20*	4,0	4,3	400	8	24	10	140	50	0,0073
MT 01 025.0 000.0	25*	4,3	4,6	530	8	24	10	170	50	0,109
MT 01 030.0 000.0	30*	4,4	4,7	640	8	24	10	195	50	0,126
MT 01 032.0 000.0	31,8*	4,4	4,7	670	8	24	10	205	50	0,132
MT 01 035.0 000.0	35*	4,4	4,7	730	7	21	10	220	50	0,171
MT 01 038.0 000.0	38,1*	4,4	4,8	790	7	21	10	235	50	0,206
MT 01 040.0 000.0	40*	4,3	4,8	810	7	21	10	250	50	0,214
MT 01 045.0 000.0	45*	4,4	4,8	910	6	18	10	275	50	0,236
MT 01 050.0 000.0	50*	4,9	5,3	1130	6	18	10	300	50	0,436
MT 01 052.0 000.0	50,8*	4,9	5,3	1150	6	18	10	300	50	0,442
MT 01 055.0 000.0	55*	5,3	5,8	1370	6	18	10	330	50	0,384
MT 01 060.0 000.0	60*	5,4	5,9	1510	6	18	10	355	50	0,620
MT 01 063.0 000.0	63,5*	5,6	6,0	1640	6	18	10	370	50	0,652
MT 01 070.0 000.0	70*	5,8	6,3	1850	5	15	10	410	50	0,714
MT 01 076.0 000.0	76,2*	5,8	6,3	2000	5	15	10	440	50	0,767
MT 01 080.0 000.0	80*	5,9	6,6	2130	5	15	10	460	30/50	0,671/0,805
MT 01 090.0 000.0	90*	6,2	6,9	2520	4	12	10	530	30	0,747
MT 01 100.0 000.0	100*	7,1	7,9	3220	4	12	9	600	30	0,889
MT 01 102.0 000.0	102*	7,1	7,9	3280	4	12	9	600	30	0,905
MT 01 110.0 000.0	110*	7,2	8,0	3560	4	12	9	690	30	1,290
MT 01 127.0 000.0	127*	7,3	8,1	4140	4	12	9	800	30	1,466
MT 01 150.0 000.0	151,5*	9,0	10,0	6200	3	9	8,5	1300	20	1,372
MT 01 152.0 000.0	152,4*	9,0	10,0	6230	3	9	8,5	1300	20	1,379
MT 01 203.0 000.0	203,2*	10,7	12,5	10030	2	6	7	1200	10	1,826

*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / *Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity